




HENGSHUI HUIYA NEW-MAT TECHNOLOGY CO., LTD.

HIGH TEMPERATURE RUBBER EXHAUST HOSE

The rubber exhaust hose is the most flexible hose available, because of the large number of spiral turns and the smooth EPDM rubber.

Thanks to the addition of spiral reinforcement and a more suitable rubber variety, the exhaust hose is now stronger and more flexible. Increased flexibility reduces valuable installation time throughout the size range.

Sizes of 30mm, 40mm, and 50mm are ideal for generators and small engines installed in tight Spaces, while larger diameters can be bent, even for short connection lengths.

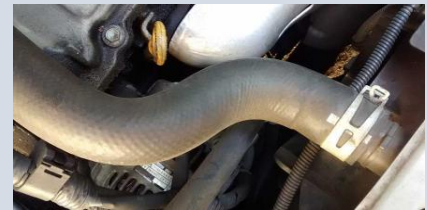

The exhaust hose has been certified by Lloyd's register and complies with the SAE J2006 R2 standard. They range from -30°C to + 100°C, with a brief peak temperature of 115°C.

Products properties:

Tube: smooth black rubber, abrasion resistant.

Reinforcement: high tensile textile plies, helix wire embedded.

Cover: black, abrasion and weather resistant rubber. Corrugated cover, fabric impression.

Temperature: -30°C to +100°C.



SPECIFICATION:

Ref.	Inside diameter	Outside diameter	Bend radius	Weight
HY032	32 mm	42 mm	65 mm	0,77 kg/m
HY040	40 mm	49 mm	80 mm	0,92 kg/m
HY045	45 mm	56 mm	90 mm	1,02 kg/m
HY051	51 mm	60 mm	100 mm	1,12 kg/m
HY060	60 mm	70 mm	120 mm	1,47 kg/m
HY065	63 mm	74 mm	125 mm	1,72 kg/m
HY076	76 mm	88 mm	150 mm	1,98 kg/m
HY080	80 mm	93 mm	160 mm	2,12 kg/m
HY085	85 mm	97 mm	170 mm	2,28 kg/m
HY090	90 mm	102 mm	180 mm	2,57 kg/m
HY102	102 mm	114 mm	200 mm	2,84 kg/m
HY105	105 mm	118 mm	210 mm	2,94 kg/m
HY115	114 mm	128 mm	225 mm	3,35 kg/m
HY127	127 mm	140 mm	250 mm	3,64 kg/m
HY152	152 mm	164 mm	300 mm	6,84 kg/m
HY180	180 mm	194 mm	360 mm	6,54 kg/m
HY203	203 mm	218 mm	400 mm	7,44kg/m

www.huiyahose.com; manager@huiyahose.com; [+Whatsapp/Viber/Mobil:+86-13931836368](https://api.whatsapp.com/message/31563636368)